

SMARTLIFT DELIVERS PRODUCTIVITY!

From every angle, we've designed SmartLift® to help you get the most from your service facility - maximum productivity, minimum downtime, a clean shop appearance and peace of mind **from a partner you can trust!**




Stem: S2708
10,000 lbs. capacity

SMARTLIFT® TRIO™ ARMS

3-STAGE ARMS IN A 2-PIECE, LOW PROFILE DESIGN = 18% GREATER REACH THAN TRADITIONAL ARMS

Reach a wider range of vehicle pick-up points with greater vehicle and lift clearance.

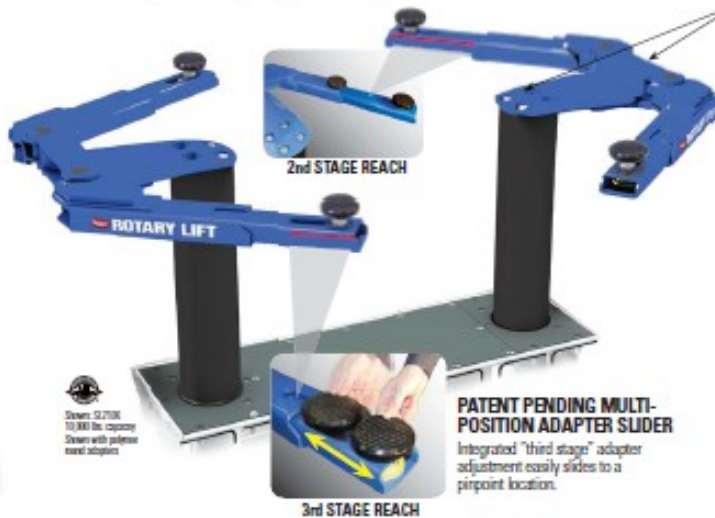

PATENTED LOWER PROFILE YOKE WITH LOW DRIVE OVER PAD = GREATER DRIVE THRU CLEARANCE

With a lower contoured profile, the superstructure allows for easier entry and exit to service bay and additional drive thru clearance between lift and vehicle.



More clearance between lift and vehicle

PATENT PENDING MULTI-POSITION ADAPTER SLIDER

Integrated "third stage" adapter adjustment easily slides to a pinpoint location.

ADAPTERS ARE INTERCHANGEABLE
Choose the adapter your vehicles need.

Three-position **flip-up adapters** allow quick positioning on a variety of pick-up points.



Polymer round adapters
These adapters screw into position and are ideal for unbody vehicles.



Screw up **truck adapters** are required for fitting full-frame vehicles.



SMARTLIFT PERFORMS

WITH FEATURES & SERVICIBILITY YOU WON'T FIND ANYWHERE ELSE!

TRIO™ 2-PIECE, 3-STAGE ARM

Integrated, patent pending "third stage" adapter adjustment.

3-POSITION WHEEL SPOTTING DISH

Helps techs spot vehicles correctly every time.

EXCLUSIVE SMARTGUARD™ COATED PLUNGERS

Prevent corrosion and increase the service life of lift.



ROUTINE CYLINDER REPAIR TIME IS CUT BY AS MUCH AS 75% WITH Easy Access™

Reduce routine cylinder repair time with this feature and see a **savings of \$57.00 in downtime!**



EASILY REMOVED CENTER COVER

Allows for all maintenance to be performed from the surface:

- Air fittings
- Hydraulic hoses
- Air lock cylinder



Stem: S2708
10,000 lbs. capacity
Stem with LDS

GREASE FITTINGS ACCESSIBLE AT GROUND LEVEL

Easy access for technicians.

LOCKING SYSTEM

Engages every 3", is fully accessible for maintenance and has lower to lock function at the power unit.

EXCLUSIVE LOCKING SYSTEM FOR TROUBLE-FREE OPERATION

The locking mechanism uses a patented cylinder which features stainless steel and polymer construction for maximum corrosion resistance and service life.



LIQUID DETECTION SYSTEM PREVENTS DOWNTIME

On LDS equipped lifts, the patented system signals the user if liquid accumulates in the containment. If required, a liquid removal system is also available.



RECYCLED POLYMER CONTAINMENT

The lift is protected from the environment and the environment is protected from the lift.

